INSTALLATION INSTRUCTIONS

For Model 4397

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the circuit breaker and remove old fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Install the nipple to the frame: Thread hex nut (M) onto nipple (L) then place Lock Washer (N) and Metal tray (O) onto nipple (L), thread nipple (L) to the fixture frame (E) and secure with hex nut (M).
4. Slide the glass shade (H), plastic washer (K), metal washer (J) over the nipple (L) and secure with the hex nut (I).
5. While holding the fixture frame (E) with glass shade (H), align the holes in arms (C) with the threaded studs in fixture frame (E), and thread the cap nuts (G) onto the stud of fixture frame (E) until they are snug.
6. Install the bulbs in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!)**

CONNECTING THE WIRES (Fig. 2)

7. Thread the two mounting screws (F) about 1/4" into the pre-drilled holes in the crossbar (A) spaced the same distance apart as the holes in the backplate (C).
8. Attach the crossbar (A) to the outlet box using the two screws (B) from the outlet box. The side of the crossbar (A) marked "GND" must face out.
9. At this point, connect the electrical wires as follow, Connect the black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper) connects fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the crossbar using the green screw provided.

MOUNTING FIXTURE AND SHADE (Fig.1)

10. Holding the backplate (C) toward the Ceiling, thread the backplate (C) over two Mounting screws (F), then secure with ball nuts (D).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

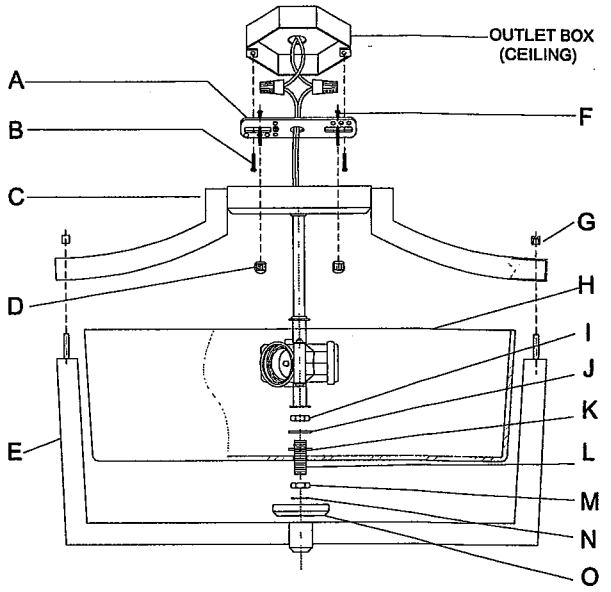

Fig. 2

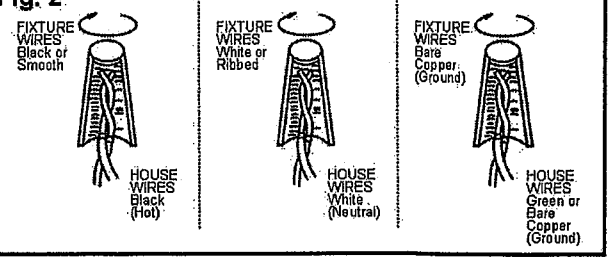
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green or Bare Copper (Ground)

american lighting association

Intertek